

**Valve Regulated Lead Acid Battery**


Maintenance-Free Sealed Lead Acid Battery.

Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

**Design for Standby Power Applications**

<p><b>【Design Life】</b> Up to 5 Years in Standby Service at 25°C Eurobat (20°C) : 3-5 years, Standard Commercial</p> <p><b>【Operating Temperature Range】</b> Nominal Operating Temperature : 25°C (77°F) Discharge : -15°C ~ 50°C (5°F~122°F) Charge: -15°C ~ 40°C (5°F~104°F) Storage: -15°C ~ 40°C (5°F~104°F)</p>	<p><b>【Float Charging Voltage】</b> 13.5 ~ 13.8 VDC/Unit at 25°C (77°F)</p> <p><b>【Equalization Charging Voltage】</b> 14.4 ~ 15.0 VDC/Unit at 25°C (77°F)</p> <p><b>【Self Discharge】</b> Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).</p>
--	---

Specification		Design according with IEC 61056-1/2: 2012	
Nominal Voltage	12V (6 cells per unit)		
Nominal Capacity	8.5Ah @20hr-rate to 1.75V per cell @25°C (77°F)		
Weight	Approx. 2.40 Kg (5.29 lbs)		
Maximum Discharge Current	100/130A (5sec)		
Internal Resistance	Approx. 23.0mΩ		
Short Circuit Current	276A		
Maximum Charge Current	2.16A		
Terminal types	F1/F2 terminal -Faston Tab 187/250		
Terminal hardware Torque	--		
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request		
Dimensions	Length (L)	150.9±2.0 mm	5.94±0.08 inch
	Width (W)	64.8±1.0 mm	2.55±0.04 inch
	Container Height (h)	94.3±1.0 mm	3.71±0.04 inch
	Overall Height (H)	98.6±1.0 mm	3.88±0.04 inch

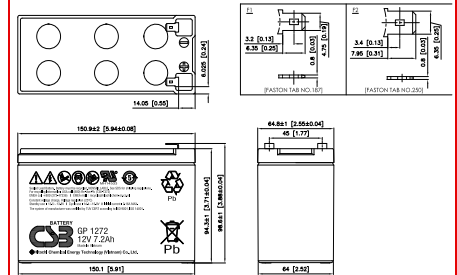

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)												
F.V/Time	5 MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	34.8	21.5	15.9	9.22	5.37	3.92	3.11	2.24	1.48	0.990	0.817	0.441
1.67V	33.2	21.2	15.7	9.18	5.35	3.91	3.10	2.23	1.47	0.988	0.815	0.440
1.70V	32.1	20.9	15.5	9.13	5.33	3.90	3.09	2.22	1.46	0.986	0.813	0.439
1.75V	30.0	20.1	15.1	8.98	5.29	3.88	3.08	2.21	1.45	0.982	0.810	0.437
1.80V	27.5	18.7	14.4	8.68	5.18	3.83	3.05	2.20	1.44	0.971	0.800	0.432
1.85V	24.2	16.9	13.1	8.14	4.96	3.72	2.96	2.14	1.40	0.942	0.776	0.418

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)												
F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	365	238	179	108	63.2	46.5	36.9	26.7	17.6	12.1	9.90	5.36
1.67V	353	234	178	107	63.1	46.4	36.8	26.6	17.5	12.0	9.89	5.35
1.70V	346	232	177	106	63.0	46.3	36.7	26.5	17.4	11.9	9.88	5.34
1.75V	329	224	173	105	62.6	46.2	36.6	26.4	17.3	11.8	9.85	5.32
1.80V	304	212	165	103	61.6	45.7	36.3	26.3	17.2	11.7	9.76	5.27
1.85V	276	195	153	97.6	59.5	44.5	35.4	25.6	17.0	11.5	9.51	5.12

Please refer to the official site for the latest rating confirmation. URL: [www.csb-battery.com](http://www.csb-battery.com) Issued: 161227

**Sales Offices**  
日立化成能源科技股份有限公司  
Hitachi Chemical Energy Technology Co., Ltd.

Recognized under UL 1989,  
and certified by ISO 9001, 14001.

**BUSINESS HEADQUARTERS**  
Tel: +886-2-2880-5600  
Fax: +866-2-2888-3300

**USA OFFICE**  
Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)  
Fax: +1-817-244-4445

**SHENZHEN OFFICE (CHINA)**  
Tel: +86-755-8831-6488, 8831-6775  
Fax: +86-755-8831-6075

**EUROPE (EMEA) OFFICE**  
Tel: +31(0)180-418-140  
Fax: +31(0)180-418-327

**SHANGHAI OFFICE (CHINA)**  
Tel: +86-21-5046-1622, 5046-0833  
Fax: +86-21-5046-1046

**TAIPEI OFFICE**  
Tel: +886-2-2880-5600  
Fax: +866-2-2888-3300

**BEIJING OFFICE (CHINA)**  
Tel: +86-10-5820-5336, 5820-5338  
Fax: +86-10-5820-3053