







|                                     |   |
|-------------------------------------|---|
| <b>Nominal Voltage:</b>             | 3.0 V   |
| <b>Typical Voltage:</b>             | 3.2-3.3 V   |
| <b>Nominal Internal Impedance:</b>  | 0.25 ohm @ 1kHz                                       |
| <b>Average Weight:</b>              | 17.0 gm   |
| <b>Volume:</b>                      | 7.18 cm <sup>3</sup>                                  |
| <b>Terminals:</b>                   | Flat, Recessed Negative Terminal, Nickel Plated Steel |
| <b>Operating Temperature Range:</b> | -20°C to 75°C<br>(-4°F to 167°F)                      |
| <b>ANSI:</b>                        | 5018LC  |
| <b>IEC:</b>                         | CR17345   |

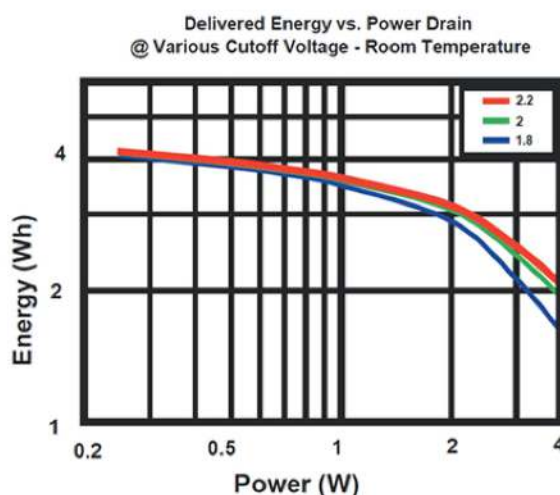

## Duracell Ultra 123 Typical Performance

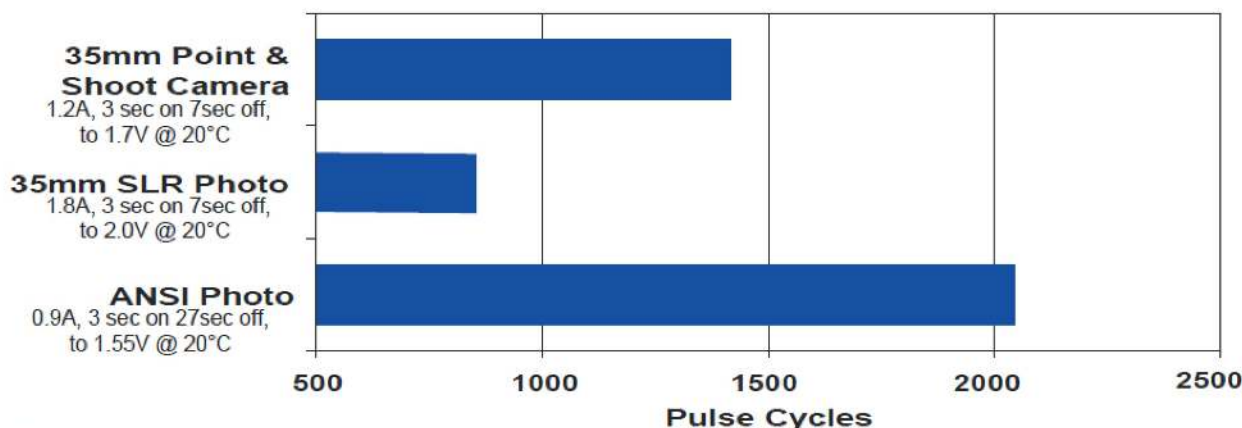

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

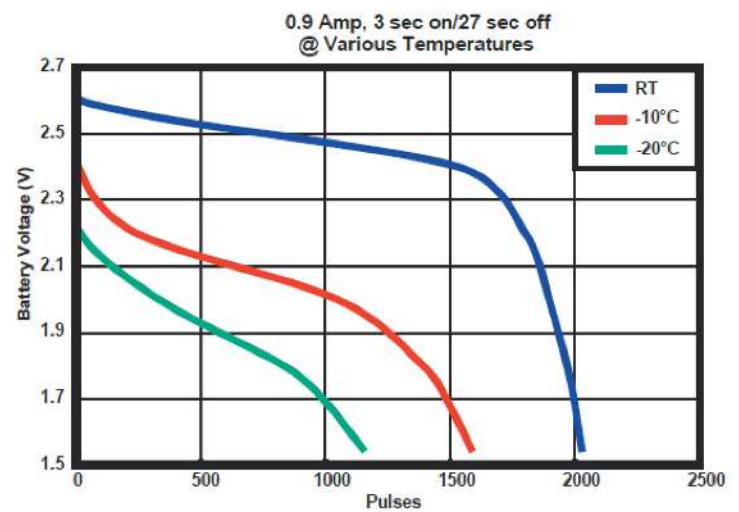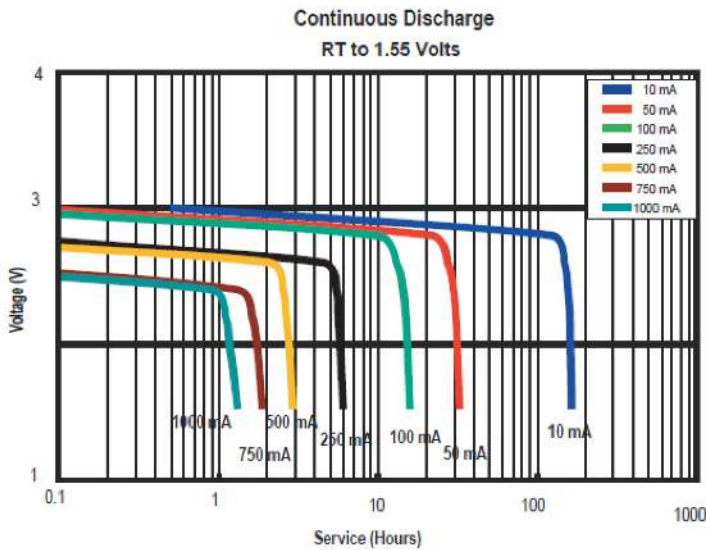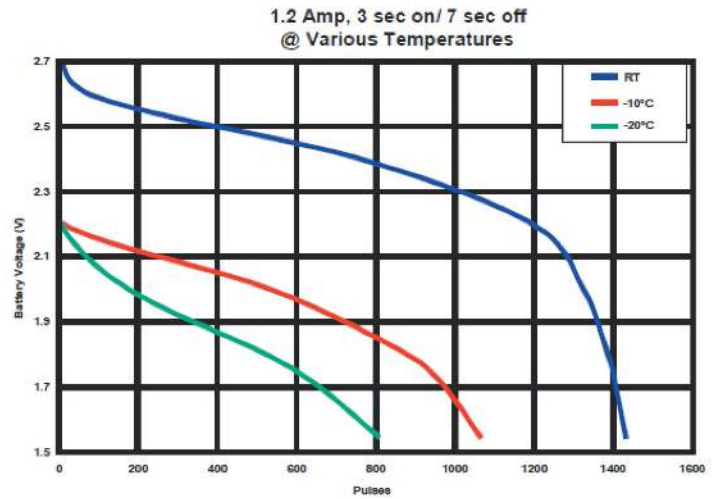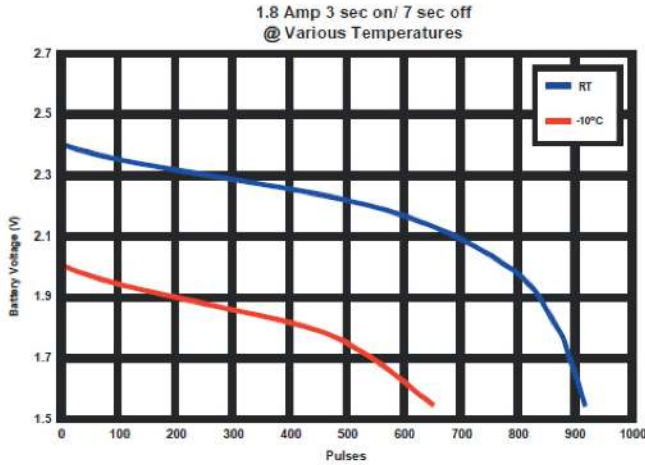

## DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.