



CR2032 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 A = 17.6 B = 20.0^{+0.3}_{-0.3} C = 2.4 D = 3.2^{+0.0}_{-0.3} Dimension: mm 
Nominal Capacity	210mAh	
Continuous Standard Load	15K Ω	
Operating Temperature	-20° - 70°C	
Weight	3.2g	
Max. Continuous Discharge	0.2mA	
Max. Pulse Discharge	5mA	


Discharge Characteristics

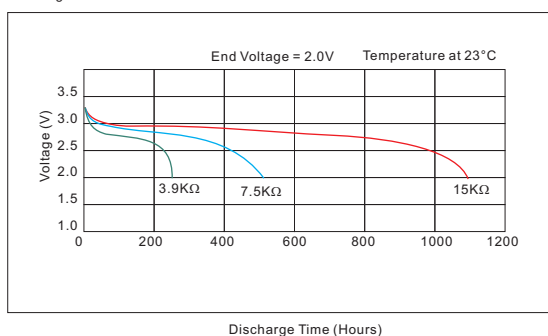


Temperature Characteristics

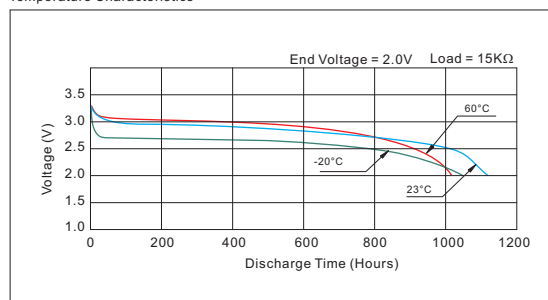


Load vs. Operating Voltage

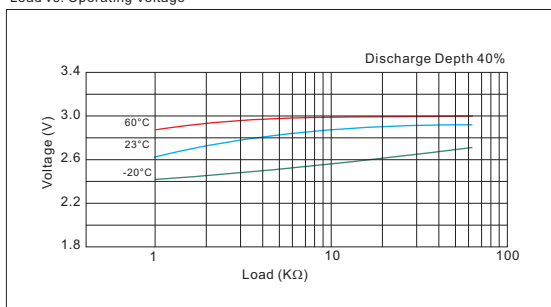

Load vs. Capacity

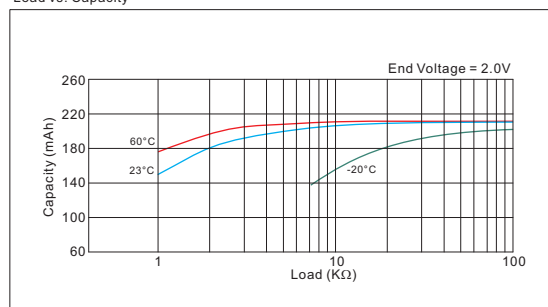

Pulse Discharge Characteristics

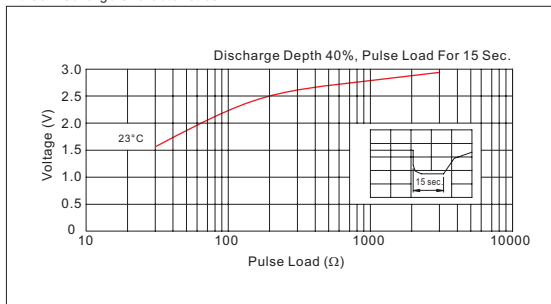

Storage Characteristics

